Feyachi®

Reflection Sight


User Manual

Operating Instructions

For optimum performance and to prevent damage to this precision instrument, carefully follow all instructions.

Contents

Specification 3
Inside the box 3
Diagram 4
How to use 5
Zeroing 7
Elevation & Windage Adjustment . . 7
Notice 8
Contact 8




Specification

Magnification	1x
Objective aperture	24mm×34mm
Field of View	15.8@ 100m
Windage/Elevation Click Value	0.5 MOA per click
Adj. Range	+/- 60MOA
Eye Relief	Unlimited
Length	82mm
Battery	.Li—polymer
Weight	4 oz
Size	3.2″ x 1.5″ x 2.1″

Inside the box


1 x Reflection Sight
1 x Rubber lens Cap Cover
1 x Cleaning Cloth
2 x Wrenches

Diagram

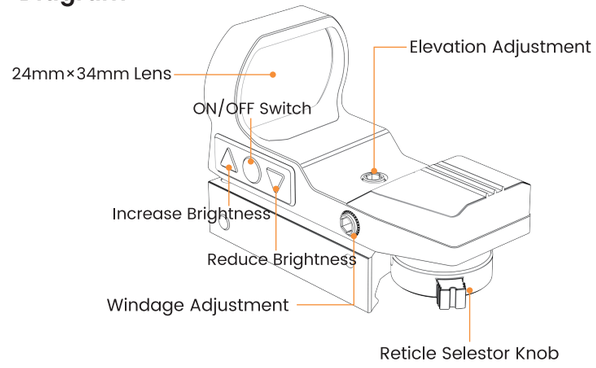


How To Use?

1.Charging
Connect the USB end of the charging cable to an external USB power DC 5V 1-2A source, then attach the other Type-C end of the cable to the charging port of the product.

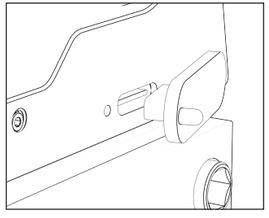


2.Turn on the reflection sight
Press the ON/OFF Switch to turn on the reflection sight.And use buttons on both sides to increase or decrease the brightness.At the highest 5th gear or the lowest 1st gear, when you press the button to increase or decrease the brightness, the light will blink, indicating that you have reached the limit gear.

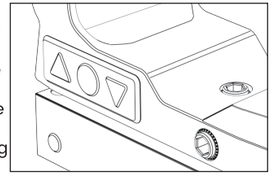

3. Select the reticle

Pull the reticle selector knob. There are 4 reticle patterns to choose. When the power is on, press and hold the ON/OFF Switch for 3 seconds to switch the color

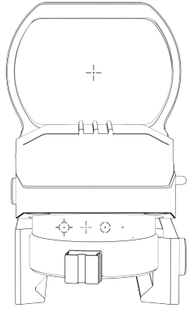




Zeroing

Select the reticle you desire by turning the reticle selector knob and set your intensity at the best position. With the sight mounted, rest the equipment on a solid support and aim at a target 50 to 100 yards away. Test shots should be done in the same conditions to achieve maximum accuracy for adjustmenr, for which the use of equipment rest for firing if recommendable. Each click adjustment moves the point of impact by 0.5 MOA (approximately 1/2 ″ at 100 yds)

Elevation & Windage Adjustment

1. Release the locking screw with the allen wrench until loosen.
2. Adjust the elevation and windage to the zero position.
3. Tighten the locking screw until it's locked.



Notice

Feedback from some customers states that the sights are blurry or it shows double images.Please don't worry,It just need 3-5 minutes to preheat when you first time to use it.(Just turn on and let it stay for 3-5 minutes).Then it will show clearly.
If it still results the same, please do not hesitate to let us know before you low rating, we will try our best to help you out.

Contact

info@feyachi.com
www.facebook.com/Feoutdoor
www.feyachi.com
(1)877-734-1687

MADE IN CHINA