
Feyachi®

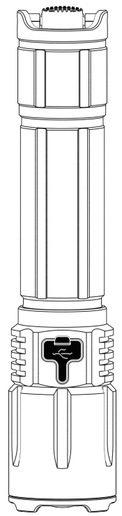

Flashlight Operation Manual

Feyachi FL26 2000 Lumen Tactical Flashlight

PRODUCT OVERVIEW


Introducing our latest tactical flashlight, designed for ultimate brightness and versatility. With a stunning brightness of up to 2000 lumens, this flashlight is perfect for illuminating even the darkest environments. Featuring a strobe function for signaling or disorienting, and a zoomable aperture to adjust the focus of the beam, this flashlight is adaptable to various scenarios. Additionally, it can be mounted on standard M-lok rails, making it an ideal choice for attachment to gear. Whether for outdoor adventures, search and rescue missions, or self-defense, this tactical flashlight is a reliable and powerful tool.

SPECIFICATIONS


Material	AL6061-T6 Aluminum Alloy
Lumen Value	2000 lumen MAX
Waterproof Rating	IPX7
Irradiation Distance	300 Meters
Duration of Irradiation	Super bright (40S 2000LM) High bright(3H 1000LM) Low bright(6H 300LM)
Charging Time	4-5 Hours

Please unscrew the tail cover and remove the battery insulation sheet before use!


PACKAGE CONTENTS



FL Rechargeable Flashlight




Pressure Switch Mounting Plate




Tactical Pressure Switch



Velcro Strap



Rail Mount Kit



USB Charging Cable


CHARGING

Charge the flashlight before use.

A USB to Type-C charging cable is included in the package.

Connect the USB end of the charging cable to an external USB power supply, and plug the Type-C end into the flashlight to charge it.

Note: The device requires a 5V/2A USB charger for a full charge (4-5 hours). Using a lower-power charger will extend the charging time.

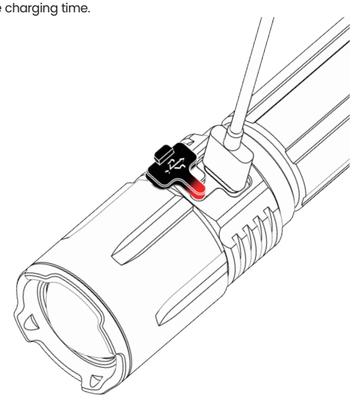



INDICATION	Red Indicator light means charging. Green Indicator light means full charge.

OPERATING MODES

Switch A Controls:

Press Switch A once: 800LM ON
Press Switch A again: OFF
Press Switch A once: 200LM ON
Press Switch A again: OFF





When Switch A is ON (e.g. in 800lm mode):

Press and hold Switch B: Activates 2000LM → Release to return to Switch A's current mode (800LM)

Double-click Switch B: Activates 2000LM (after 40 seconds dims to 1000LM)

Single-click Switch B: Returns to Switch A's current mode (800LM)

Triple-click Switch B: Activates strobe mode

Single-click Switch B: Returns to Switch A's current mode (800LM)

When Switch A is OFF (flashlight is off):

Press and hold Switch B: Activates 2000LM → Release to turn off

Double-click Switch B: Activates 2000LM


Single-click Switch B: Turns off

Triple-click Switch B: Activates strobe mode

Single-click Switch B: Turns off the flashlight

Adjustable Focus


Simply rotate the flashlight to adjust the zoom.The zoom design includes a wide and narrow beam zoom, which makes it easy to focus on nearby or distant objects.






Flashlight Installation


This flashlight Contains an ML87 M-lok Versatile Mounting Option Offset Flashlight Ring Mount.




Diverse Mounting Position



Forward Offset




Backward Offset




No Offset

INSTALLATION


1. choose one of the mount types. The below installation is based on the forward offset.
2. Connect the screws and nuts through the holes of the offset mount. Keep it loose but connected.




3. Put the nuts into the M-lok rail then tighten the screws with the Allen wrench.




4. Put the flashlight ring mount into the offset mount.




5. Tighten the screws with the allen wrench.

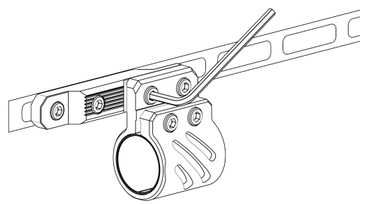

6. Put the flashlight through the ring mount. The 2 inserts are for different diameter flashlights.

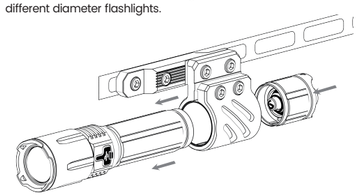


7. Tighten the screws with the Allen wrench.

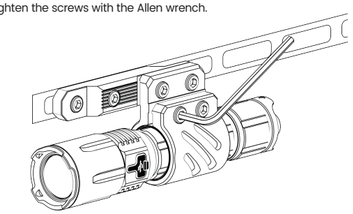

Pressure Switch Installation


MP22 For Mlok

Remote switch across through the mounting plate and put the pressure pad in position.snaps it into the base. then mounts to Mlok systems with T-nuts included.



MP23 For Picatinny

Remote switch across through the mounting plate and put the pressure pad on position, it can be easily snapped onto the Picaitnny rail



WARNING

The body temperature of the flashlight will AN reaches 60°C (140°F) on High output mode. DO NOT HOT touch the flashlight body at the first 30 mins on High mode to prevent hurting the user's hand.

Keep out of reach of children.
If the light is about to be put aside for a long time or transported, please unscrew the tail cap and remove the battery to cut off the circuit.

DANGER

DO NOT throw the light directly into human eyes. This may cause temporary blindness, or permanent damage to the eyes.
DO NOT cover the light head when the flashlight is on, or place the light head on the ground. The radiation and the energy of the light may cause damage to the flashlight itself, or even result in the burning of flammable objects.
DO NOT use Non-protected rechargeable batteries.
DO NOT immerse the flashlight to water.

WARRANTY

Within 30 days of purchase: Return to the retailer from which you purchased for a refund or replacement.

Within 1 year of purchase: Return to the retailer from which you purchased for repair or replacement. This warranty does not cover normal wear and tear, modifications, misuse, disintegrations, negligence, accidents, improper maintenance, or repair by anyone other than an Authorized retailer.

CUSTOMER SERVICE

info@feyachi.com
www.feyachi.com
www.facebook.com/feyachistore
(1)877-734-1687

Feyachi®

Finally, thank you very much for supporting and purchasing Feyachi!