

B13 Tactical Bipod

User Manual

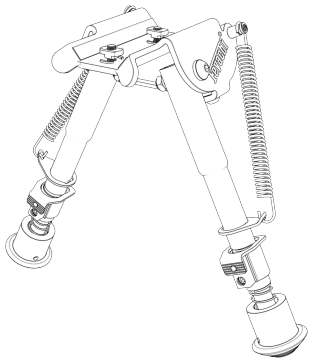

- Feyachi B13 Bipod Compitable with Mlok Handguard
- Directly Attach to the Mlok Rail System
- Lightweight 8.7 oz
- Sturdy Aircraft Aluminum and Hardened Steel Construction

Feature Illustration

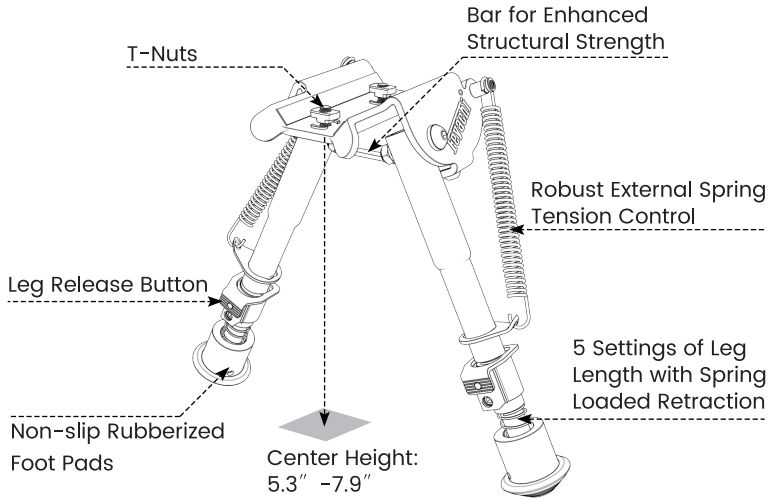


Model No.	Stand Type	Center Height (Min-Max)	Leg Length (Min-Max)	Extendable Leg	Foldable Leg	Open Angel
B13	Rubberized	5.3″ -7.9″	6″ -9″	Yes	Yes	65°

Bipod Installation


STEP 1

Install the T-Nuts and screws to the Mounting Base of the Bipod, make sure the gap between the T-Nut and the bipod mounting base is slightly larger than the thickness of the handguard.

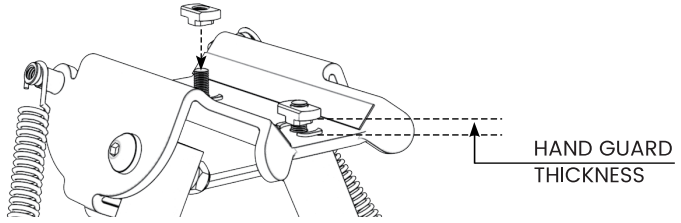


STEP 2

Position the feet of the Bipod facing forward in the direction of the muzzle. Place the mounting base so that the T-Nuts insert into the desired slots of the handguard.

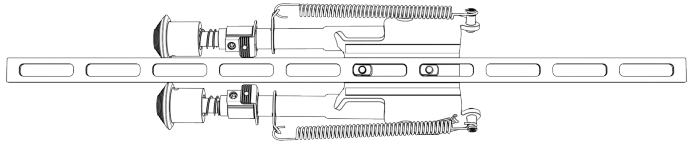


STEP 3

Once seated, hold the mounting base in place and tighten the T-Nuts by turning the Allen Wrench until securely tightened.

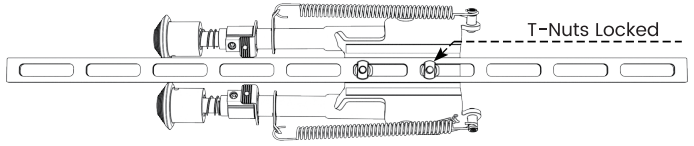

STEP 4

Pull the legs down. To extend the legs, push on the release button, you will see the notches in the legs for adjustment of length.

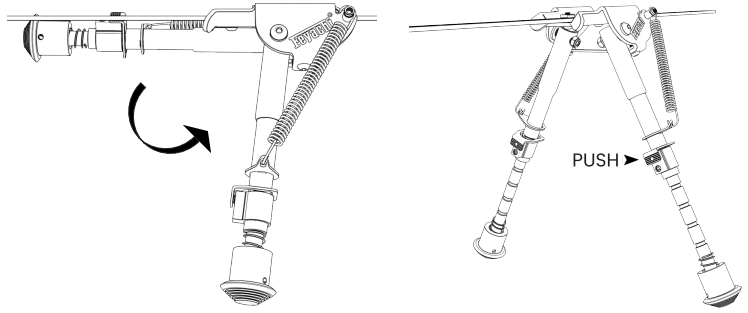

WARNING: BEFORE STARTING, MAKE SURE THE WEAPON IS UNLOADED, THE CHAMBER IS EMPTY, AND THE SAFETY ENGAGED.

Inside the Box

B13 Tactical Bipod
Allen Wrench
T-Nuts（4）
Screws（4）
User Manual

Warranty

Within 12 months of purchase: Return to Feyachi for repair or replacement. This warranty does not cover normal wear and tear, modifications, misuse, disintegrations, negligence, accidents, improper maintenance, or repair by anyone other than an authorized retailer or Feyachi itself.

Customer Service

info@feyachi.com
www.feyachi.com
www.facebook.com/feoutdoor