FL Series Flashlight

User Manual

INSIDE THE BOX

- FL Flashlight
- Tactical Pressure Switch
- Lanyard
- Rail Mount Kit(Base on the model)
- User Manual

SPECIFICATIONS

Material: AL6061-T6 Aluminum Alloy

LED: Cree XML

Brightness: 1200lm Max


Runtime: 3.5Hrs

Illuminating Range: 200m


Waterproof Level: IPX4

HOW TO OPERATE

Tailcap switch features ON/OFF. Press one time to turn on the light, press again to shut down.

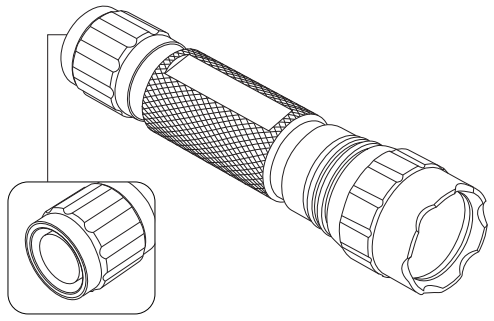


The included pressure switch allows for easy single-handed operation. Comes with a constant on button switch and a momentary on pressure switch (2 modes) for different tactical needs.

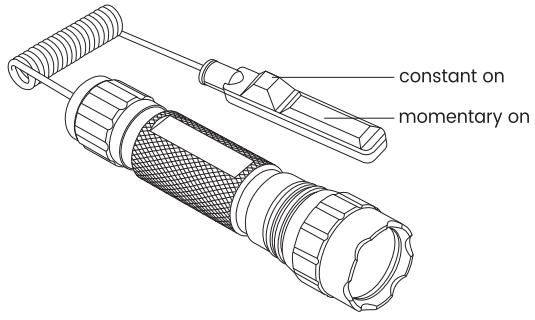


FLASHLIGHT RAIL MOUNT

The rail mount type you get base on the model you ordered. （FL11 FL14 FL17 FL22）


FL11 Contains a Picatinny 45 Degree Flashlight Ring Mount.

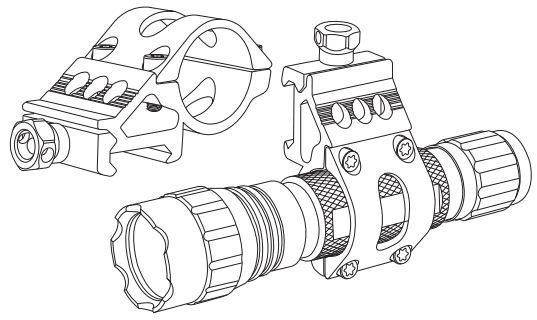


FL17 Contains a M-lok 45 Degree Flashlight Ring Mount.

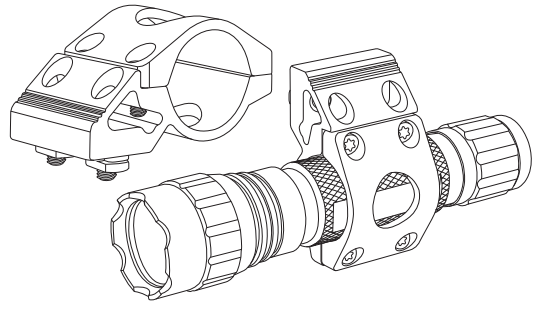

FL22 Contains a M-lok Flashlight Ring Mount.

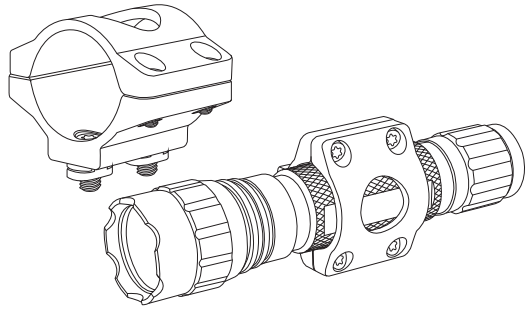


FL14 Contains a ML87 M-Lok Versatile Mounting Option Offset Flashlight Ring Mount.

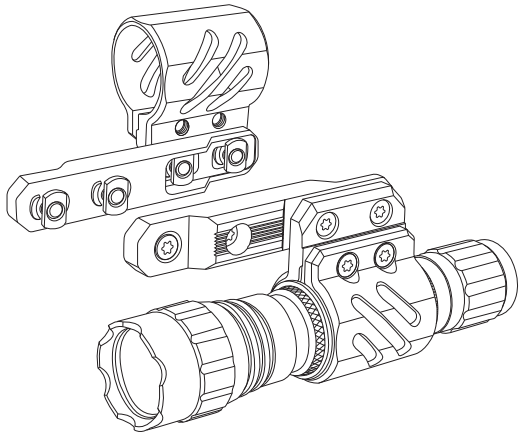


For customers who order the FL14, the included ML87 has detailed user manual as below:

Diverse Mounting Position


Forward Offset

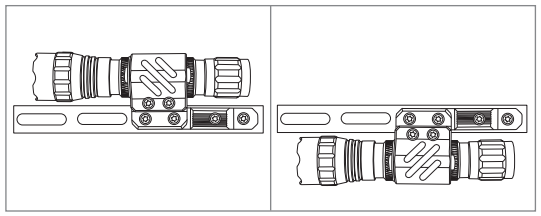

Backward Offset

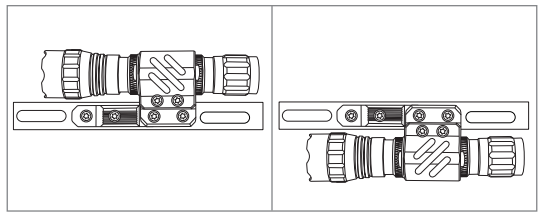


No Offset

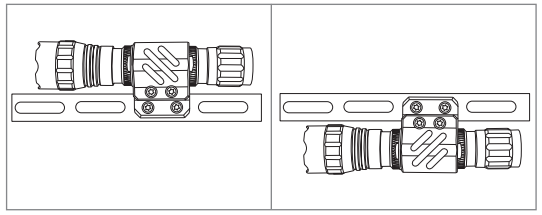


Installation

1. choose one of the mount type. The below installation is based on the forward offset.


2. Connect the screws and nuts through the holes of the offset mount. Keep it loosen but connected.

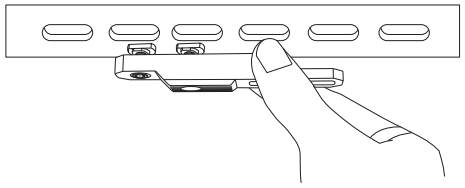


3.Put the nuts into the M-lok rail then tighten the screws with the allen wrench.

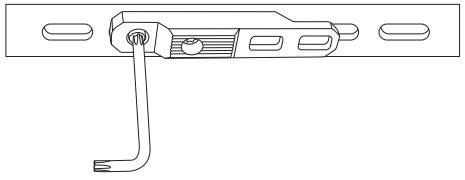


4.Put the flashlight ring mount into the offset mount.

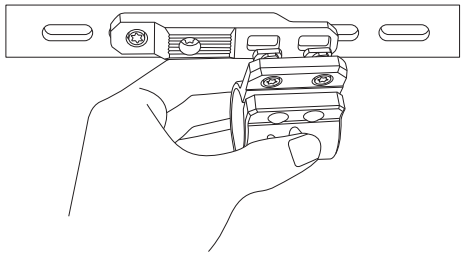


5.Tighten the screws with the allen wrench.

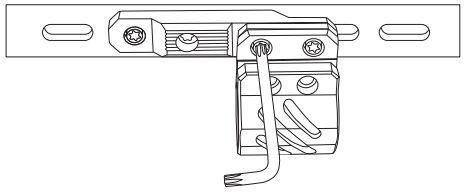

6.Put the flashlight though the ring mount. The 2 inserts are for different diameter flashlights.

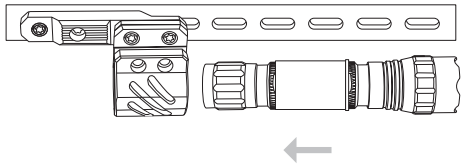

7. Tighten the screws with the allen wrench.

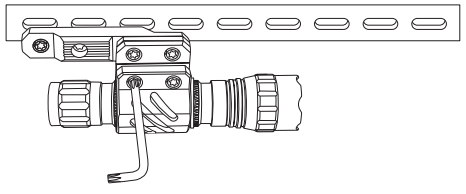

DANGER

DO NOT throw the light directly into human eyes. This may cause temporary blindness, or permanent damage to the eyes.

DO NOT immerse the flashlight to water.

WARRANTY

Within 30 days of purchase: Return to retailer from which you purchased for repair or replacement.

Within 3 years of purchase: Return to our store for repair or replacement. This warranty does not cover normal wear and tear, modifications, misuse disintegrations, negligence, accidents, improper maintenance, or repair by anyone other than an Authorized retailer or ourselves.